


Model: YS-132NO/NC-S


Specification

Size	250Lx25Wx31H(mm)
Voltage	12VDC
Current	200mA
Feature	Fail Secure(YS-132NO-S) Fail Safe(YS-132NC-S)
Suitable For	Wooden Door, Metal Door
Finishing	Electroplating
Weight	0.4kg


Diagram(unit:mm)

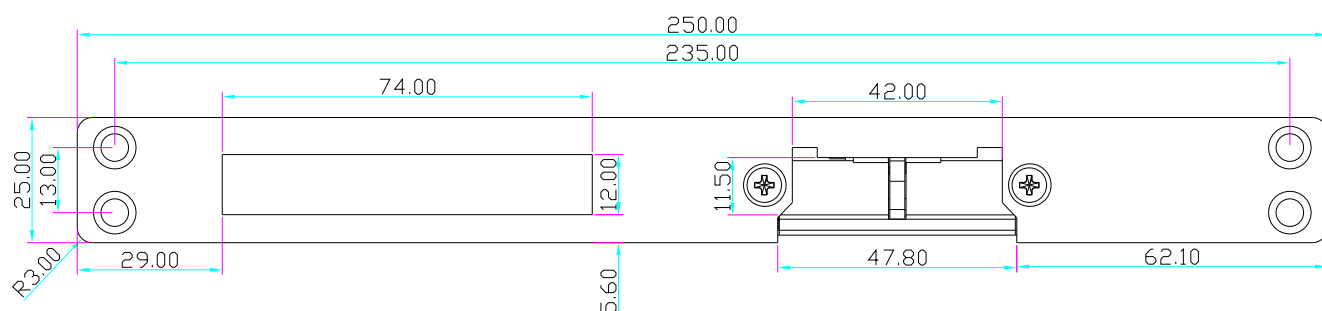

Options of Mechanical Lock

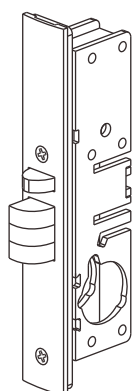


Mechanical Lock

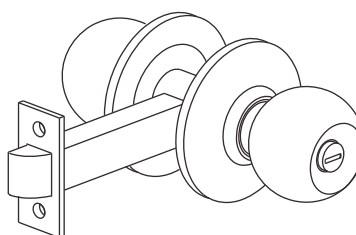


Knob lock


Installtion




1 Cut hole according to the dimension of strike.



2 Assemble the lock and connect it to the power to test




3 Fix the electric strike




4 Finished

Suitable for

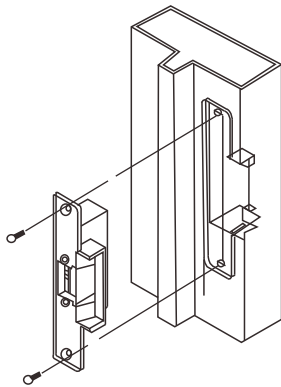


Metal Door Frame

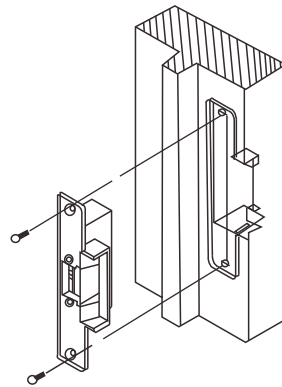


Wooden Door Frame

NO		Green	N.C. contact output : open status
COM		Yellow	Door Status output
NC		White	N.O. contact output : closed status
+		Black	12VDC(Positive and negative are the same)
-		Black	



12VDC



NO COM NC

Wire connection

